





**Manufacturer of industrial fixed and adjustable supports for piping systems including pipes, valves, elbows, flanges, tees and controls for the natural gas, petroleum, power generation and chemical industries.**

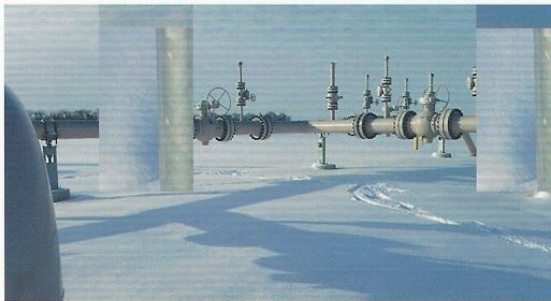

## Basic Configurations

- Pipe Saddles
- Flat Saddles
- Flange Supports
- Custom Orders

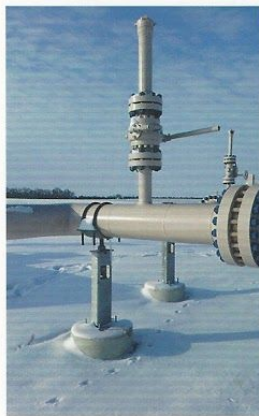

## Features

- Proprietary tubular pedestal design
- Quality construction/design from 40 years of steel fabrication experience
- FRP liner options for all interface surfaces
- Standard hot dipped galvanized coating or custom paint options
- Poly sleeved U Bolts
- Lubricated support nuts
- Standard plus/minus 2" vertical adjustment
- Customized supports for special applications



19965 Newtown Rd.  
Oakwood, Illinois 61858  
[www.jamesonsteel.com](http://www.jamesonsteel.com)

Office: 217-354-2205  
Fax: 217-354-4053  
E-mail: [info@jamesonsteel.com](mailto:info@jamesonsteel.com)

**Division of Jameson Steel Fabrication, Inc.**  
*Provider of superior steel fabrication since 1974*

REF HPSS-42016

Subject to change without notification

# Heartland Pipe Support Systems


Division of Jameson Steel Fabrication, Inc. • www.jamesonsteel.com

## Heartland Pipe Support Systems Configurations

Pipe Size	Pipe Schedule	Connection Type	Options A, B&C Saddle Width (Inches)	Options A, B&C Saddle Degree (Degrees)	Saddle Liner	Flange Class	Base Plate Type	Pipe Center Distance +/- Vertical Adjustment (Inches)	Pipe Stand Finish	U Bolt Finish	U Bolt Covering
2	5s	A=Pipe Saddle/0 U Bolt			0=none	000=N/A	0=No Base Pl	"X"/2=Std	G=Galv	G=Galv	PY=Poly
2.5	5	B=Pipe Saddle/1 U Bolt			1=FRP	150	1=Std Ext Anchor		P=Paint	P=Paint	0=None
3	10s	C=Pipe Saddle/2 U Bolt				300	2=Std Int Bolts		0=None	0=None	
3.5	10	D=Flange				400	3=No bolts				
4	20	E=Pipe Saddle/0 U Bolt				500					
4.5	30	F=Pipe Saddle/1 U Bolt				900					
5	40s/std	G=Pipe Saddle/2 U Bolt				1500					
etc.	etc.	2=Custom				2500					

Examples Stand Identification Number

1 12-40-C-09-120-1-000-1-42/2-G-G-PY  
 Ex. 1. 12" Sch 40 pipe with a (2) U bolt pipe saddle, with 9" wide saddle, ~120 degrees interface contact, FRP liner, std external anchor bolt base plate, 42" from bottom of base plate to pipe center with plus/minus 2" adjustment (40"-44" to pipe centerline), galvanized stand, galvanized U bolts with poly sleeve protection

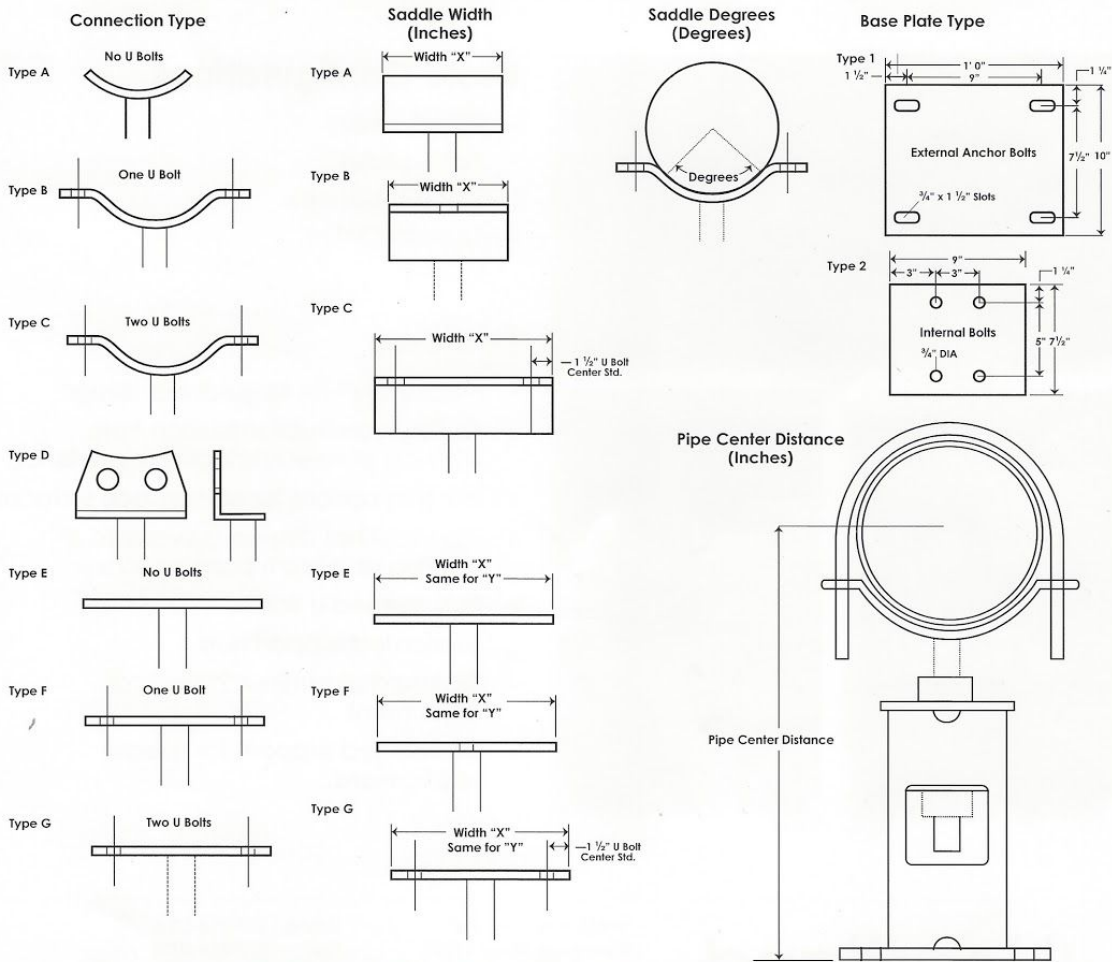

## Heartland Pipe Support Systems

Division of Jameson Steel Fabrication, Inc.  
 Provider of superior steel fabrication since 1974

19965 Newtown Rd.  
 Oakwood, Illinois 61858  
 www.jamesonsteel.com

217-354-2205 Office  
 217-354-4053  
 info@jamesonsteel.com